



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

PCT / IB 03 / 0 52 1 4  
2 0. 11. 03

REC'D 0 2 DEC 2003

WIPO

PCT

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

02102642.2

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**BEST AVAILABLE COPY**



Anmeldung Nr:  
Application no.: 02102642.2  
Demande no:

Anmeldetag:  
Date of filing: 25.11.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Display with reduced Block dim effect

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G09G3/36

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Description

Display with reduced Block dim effect

The present invention is directed in general to a display or a LCD-panel, and particularly to a LCD-panel whose gate drivers are assembled without a printed circuit board (PCB). This  
 5 technique is so called PCB-less, where the wiring of the gate drivers is not done with conventional printed circuit boards (PCB), but directly on the LCD-glass. The invention is also applicable for chip on glass technique (COG).

LCD panels have a wide application area, i.e. for mobile phones, personal digital assistants,  
 10 notebooks or TV screens.

There are new assembly technologies. Firstly the so called "PCB-less" technique, where the wiring of the gate driver is not done with a conventional printed circuit board (PCB), but directly on the LCD glass and the gate driver chips are mounted on foils (chip-on foil ,COF)  
 15 which are contacted to the glass wires. Secondly the so called chip-on glass technique, where the gate drivers are directly connected to the glass wiring.

These new assembly techniques are low-cost but have the disadvantage that the on-glass wiring track resistance is much higher than the track resistances found on printed circuit  
 20 boards. The sheet resistance for the on glass interconnection is 100 times higher, than for the PCB- technique. This difference is due to the fact that PCB conductors are thicker and use low-resistively material, i.e. laminated copper around 35- $\mu\text{m}$  thick, compared to on-glass conductors, which uses usually vapour-deposited Al around 0.2- $\mu\text{m}$  thickness. Typical values for the track resistance between two gate drivers are 250 for the gate off supply track and up  
 25 to 1000 for tracks of other signals. The gate off supply track (VL) supplies the OFF state voltage of the gate lines, it holds the TFT-transistors of the non-addressed lines in the non-conducting (OFF) state.

The increase of track resistances leads to application problems, such as the 'block dim'  
 30 problem. The block dim problem is mainly caused by the track resistance on gate off supply

line (VL). To lower on-glass track resistance, the width of the tracks can be increased, but the space on the LCD-panel available for routing of all tracks is limited. As a consequence, the gate off supply line (VL) track is made as wide as possible, since it is the most critical, and the other tracks are thinner.

5

A LCD-panel for XGA-resolution typically uses 3 gate drivers with 256 output channels each. On PCB-less or COG-panels all supply lines to the gate drivers and control signals are routed from one LCD-panel corner to the gate drivers on the active plate of the LCD-panel. As a consequence, the track resistance, which is relevant for the third gate driver is about 3  
10 times higher than the track resistance for the first gate driver. In general the number of the gate drivers depends on the size of the LCD-panel.

An active matrix LCD-panel is composed of an array of pixels, whose number is a function of the panel resolution. For example, an XGA panel has  $1024 * 768$  pixels. A pixel is usually  
15 composed of 3 dots, one for every basic colour (Red, Green and Blue). Thus, the XGA-panel example has a total of  $1024 * 3$  columns on the horizontal axis (x-axis) and 768 rows or lines the vertical axis (y-axis). Each dot is connected to its respective column electrode through a switch. The switch is addressed (eg switched ON or OFF) by the row electrode. To drive the dots of a selected row, a voltage is applied to the column electrode and the switches are  
20 switched ON. This allows all dots of the selected row to charge to the voltage present on the column electrodes. At the end of the addressing time, the switches are switched OFF, which means that the dots are disconnected from the column electrodes and hold their value (charge) until they are selected the next time. This line by line addressing of the individual dots is commonly referred to as the "horizontal scanning" of the display. All the dots of a  
25 display are usually refreshed at a frame rate of some 60Hz. This means that for the XGA panel example, a single line is addressed in  $(1/60)/768 \approx 20\mu\text{sec}$ , which is referred to as the line (addressing) time.

In most active matrix LCD panels, the switch is formed with a so called Thin Film  
30 Transistor (TFT). A TFT-transistor has 3 terminals: drain, gate and source. On a TFT-LCD dot, the gate is connected to the row electrode commonly referred to as gate line (GLy). The source is connected to the column electrode commonly referred to as source line

(SL<sub>x</sub>). The drain of the TFT-transistor is connected to the LC capacitance (dot node). The second plate of the dot capacitance is connected to a common counter electrode (V<sub>com</sub>). Due to a considerable charge leakage of the TFT-transistor, there is a need for an additional storage capacitor (C<sub>st</sub>) which is connected to the dot node on one side and to a reference node on the other side. Usually, the previous gate line (GL<sub>y-1</sub>) or the next gate line (GL<sub>y+1</sub>) is used as reference node because these nodes can easily be accessed. It is also possible to have an extra reference line running parallel to the gate lines, most often connected to V<sub>com</sub>. The block dim problem occurs only when either the previous gate line (GL<sub>y-1</sub>) or the next gate line (GL<sub>y+1</sub>) is used as reference node for the storage capacitor (C<sub>st</sub>). In the following LCD-panels will be discussed where the previous gate line (GL<sub>y-1</sub>) is the reference node for the storage capacitor (C<sub>st</sub>), but the solution presented can easily be applied to panels where the next gate line (GL<sub>y+1</sub>) is the reference node.

Different patterns can be applied to LCD-panels, but the most critical pattern is an asymmetrical pattern which generates high return current on the VL. One such pattern is the so called DoDo-pattern, which means Dot-on, Dot-off for neighbouring dots. When the LCD-panel is driven with asymmetrical patterns, the column to row parasitic capacitors present on the LCD-panel couple a large amount of charges in the gate off supply line (VL) of the gate drivers. However, the discharging of gate off supply line (VL) cannot be completed within one line time because of the large gate off supply line (VL) track resistance.

This incomplete discharge causes an error in the sampled voltage of the individual dots, since gate off supply line (VL) is coupled to the dot via the previously addressed gate line (GL<sub>y-1</sub>) and the storage capacitance (C<sub>st</sub>). The sampled voltage error is different for each gate driver of the LCD-panel, because the gate off supply line (VL) resistance seen by every gate driver discretely sums-up. The sampled voltage error results in different grey levels on the LCD-panel. Since the difference in grey level occur step wise, exactly at the edge between gate drivers, the eye of a user detects the transition very easily and hence horizontal block-dims are perceived.

There are some known solutions to overcome the horizontal block-dim problems.

Firstly one can try to reduce the steps in the transition between the grey blocks. This is achieved by matching the gate off supply line (VL) resistance seen by the last line of one gate driver with the gate off supply line (VL) resistance seen by the first line of the next gate driver. On a given gate driver, the increase of the gate off supply line (VL) resistance from first to last output must occur gradually in order to not produce visible steps. This would require that the gate off supply line (VL) resistance on the gate driver perfectly matches with the gate off supply line (VL) track resistance on the glass and that the value of the gate driver resistance is different for every gate driver, depending on its position in the panel (first, second or third device for XGA). A different value for the gate drivers is not possible, because the gate drivers come from the same manufacturing reel. The way to minimise the steps by using gate driver VL tracks that are kind of an average value of what should be used in every gate driver still produces perceivable block-dims.

Secondly there is a method to artificially blur the position dependent error into a larger but position independent error. This is achieved by increasing the gate off supply line (VL) source resistance to such a high value that the position dependent VL track resistance steps on the glass become negligible when compared to the source resistance. As an example, if the on-glass resistance between two drivers is 25  $\Omega$ , then with a gate off supply line (VL) source resistance of 500  $\Omega$ , the relative difference in gate off supply line (VL) resistance seen by each gate driver is small, and hence the difference in sampled error also. This method will increase the absolute value of the error though to approximately the same level for all dots and hence the front-of-screen performance of the whole LCD-panel degrades for carefully selected special patterns.

The third method to avoid the above mentioned problems is to make a perfectly smooth grey level change from line to line. This can be achieved with a special dot layout, where the capacitance (Cst) is not connected to previous or next gate line, but to a separate additional line. The additional line connected to Capacitance (Cst) is usually connected to the common electrode voltage (Vcom), hence the common denomination of "Cst to Vcom" for this solution. The main advantage of this approach is that the Vcom track resistance does not change in large steps for a complete block of lines, but in small increments from line to line. Since those increments are regular and small, they can not be detected by the eye. There are

however drawbacks of this solution. The aperture ratio (AR), e.g. the ratio between light transmissive and light blocking area in a dot, is reduced by the additional line. Further the additional Vcom lines of every row need to be connected by a contact to the Vcom summing line, which must be routed on a second metal to avoid crossing with the gate lines.

- 5 This additional process step reduces LCD-panel yield and is more expensive.

So it is an object of the invention to avoid the block-dim effects, while keeping the effort low.

- 10 This will be achieved with the features of claim 1.

- The present invention bases on the idea that a clean gate off supply line (VL) should be supplied to the storage capacitors (Cst) of the addressed gate line. It is based on the observation that only the presently addressed line needs a clean (error-less) gate off supply
- 15 line (VL) connection on the reference terminal of its storage capacitors in order to sample correct values on its dots. If the storage capacitors of the addressed line are connected to previous gate line (GL), then only this previous gate line (GLy-1) needs an error-less gate off supply line (VL). If the storage capacitors are connected to next GL, then only that next gate line (GLy+1) needs an error-less gate off supply line (VL). All other (non-addressed) lines
- 20 may have their storage capacitance (Cst) connected to a gate off supply line (VL) that does not completely discharge.

- The implementation of the invention thus consists in a circuit that connects the storage capacitance (Cst) reference terminal (GLy-1 or GLy+1 depending on panel) of the addressed
- 25 gate line GLy to a separate clean gate off supply line, which is named VLclean line hereafter. All other capacitors (Cst) remain connected to the usual VL supply line. The track resistance of VLclean line is not of big concern, since there is only one line at a time connected to it. The return current of VLclean line has  $\sim 1/n$  the value of the return current of gate off supply line (VL) and can thus fully discharge within one line time. As a consequence, all lines are
- 30 sampled with a correct reference voltage at capacitance (Cst).

This is advantageous, because the presented invention does not require a resistance matching between LCD-panel and driver. It can thus be used for any LCD-panel resolution and is tolerant to the LCD-panel process variations. Further it does not add any additional error to the system. The discharging of all non-addressed lines is only limited by the gate off supply (VL) track resistance of the LCD-panel and not additionally by a large source resistance. Thus the artefacts introduced by incomplete discharging of non-addressed rows, like reduced viewing angle, is minimised. The proposed solution does avoid the costs and performance drawbacks of the third described method by simultaneously removing any grey level change from line to line. So it can be summarised, that the present invention smartly removes the gate off supply line (VL) induced error at the right moment in the right place. The main advantage of the proposed invention is that the horizontal block-dims induced by incomplete discharging of the gate off supply line are completely removed since all addressed lines are sampled with a capacitance (Cst) reference line of identical value. This results in a uniform and correct sampled dot voltage for all rows of the LCD-panel, regardless of their position and to which driver they are connected. A small drawback of the solution is that it requires an additional track to all gate drivers of the LCD-panel.

In order that the invention may be well understood, there will now be described some embodiments thereof, given by way of example, references being made to the accompanying drawings, in which:

- Fig. 1: schematic XGA-LCD-panel with supply track resistance known from the prior art
- Fig. 2: TFT-LCD dot model
- 25 Fig. 3: block-dim effect on XGA LCD-panel
- Fig. 4: gamma curve for 6 bit resolution
- Fig. 5a: schematic diagram for capacitive coupling from source lines into gate lines
- Fig. 5b: simplification of the capacitive coupling from source lines into gate lines of Fig.5a
- 30 Fig. 6: schematic XGALCD panel with VL track disturbances due to DODO pattern
- Fig. 7: Waveform of VL track disturbance at sampling time of pixel voltage
- Fig. 8: sampling of dot voltage



- Fig9: XGA-LCD-panel with VL track disturbances due to gate line GLy discharge  
 Fig10: LCD-panel with additional supply track Vclean  
 Fig11a: state of the art output stage  
 Fig11b: output stage with additional supply line Vclean  
 5 Fig12: timing diagram of the proposed output stage

In the following figures, the same references numerals will be used to identify identical components in the various views.

- 10 Fig.1 shows a full XGA LCD-panel with 3 gate drivers GD1- GD3 as found on a PCB-less or COG assembly known from the prior art without the implementation of the present invention. All supplies and control signals (VH, VL, VDD, GND, CLK, DIS, Start) are routed from one LCD-panel corner to the gate drivers GD1- GD3 on the active plate of TFT LCD-panel. As a consequence, the track resistance seen by gate driver GD3 is about 3  
 15 times higher than one seen by gate driver GD1.

- Fig2 shows the model of a TFT-LCD dot. In this configuration the storage capacitor Cst of a gate line GLy is connected to the previous gate line GLy-1, but the model can be used for the configuration with Cst connected to the next line GLy+1 as well. Most of today's LCD-  
 20 panels use a capacitor Cst connected to previous line GLy-1. Such a dot layout is widely used because it avoids the use of an additional Vcom line per row, which would negatively affect light transmission, viewing angle, fabrication yield, cost etc.

- The capacitor Clc is the capacity of the liquid crystal cell. Cst' is a simplification of the  
 25 storage capacitor Cst in parallel with Cc, which is the overlap capacitance between GLy-1 and dot. Capacity Csgo is the overlap capacitance between source line SLx and gate line GLy. Rgl is the gate line resistance per dot. Example of typical values is: Clc = 250 fF, Cst = 175 fF, Cc = 18 fF -> Cst' = 193 fF, Csgo = 19 fF, Rgl = 10, Cgl = 109 fF.

- 30 Figure 3 shows the block dim effect on a XGA LCD-panel. The most critical block dim occurs in conjunction with a special asymmetrical pattern referred to as 'DODO' pattern. The DODO pattern displays for example white - black - white - black - white - black etc. values in consecutive columns.

The following table shows the brightness of the dots as 1 (for white) or 0 (for black) and the polarity + and - with respect to Vcom of the applied voltage (upper or lower gamma curve).

This asymmetric pattern induces large return current on the VL supply due to capacitive coupling from column to rows. This large return current produces a significant disturbance on the local VL supplies of the individual gate drivers. Due to the finite impedance of the VL tracks, the disturbances of the local VL's cannot attenuate sufficiently within one line time. Since VL is used as reference in every dot (connected to Cst), different VL levels for every gate driver produces different grey values, which results in a block dim effect showed in

Figure 3.

Red	Green	Blue	Red	'Green	Blue	Red	Green	Blue ...
Row1	1+	0-	1+	0-	1+	0-	1+	0- 1+ ...
Row2	1-	0+	1-	0+	1-	0+	1-	0+ 1- ...
Row3	1+	0-	1+	0-	1+	0-	1+	0- 1+ ...
Row4	1-	0+	1-	0+	1-	0+	1-	0+ 1- ...
Row5	1+	0-	1+	0-	1+	0-	1+	0- 1+ ...
Row6	1-	0+	1-	0+	1-	0+	1-	0+ 1- ...

... ..

With the DODO pattern, all odd columns are white and all even columns are black. The first pixel, which includes 3 dots, of row 1 will display red and blue dots (magenta), the second pixel will display green. The DODO pattern is perceived as grey by the eye, since the optical average of magenta and green is grey. Because of the chosen inversion scheme, the polarities of the applied signal changes for every column and every row (dot by dot).

As the table shows, half the dots of first row are 1+ and the other half is 0-. For Row2 half the dots are 1- and the other half is 0+. The voltage level corresponding to '0' and '1' is determined by the gamma curve, as shown in the Figure 4:

If for example '1'=Vcom +/- 0.5V and '0'=Vcom -/+ 5.0V, the average column voltage is Vcom=+2.25V for Row1 and Vcom=-2.25V for Row2. Therefore, the average column

voltage is jumping by 4.5V at every line time. This is why the DODO pattern is called an asymmetrical pattern.

Figure 5a shows the schematic diagram of the capacitive coupling from source lines SL into gate lines GL. Due to the column to row overlap capacitance  $C_{sgo}$  in every dot, this 4.5V jump of the average column voltage is capacitively coupled into all the gate lines  $G_{ly}$  of the LCD-panel. The capacitance  $C_{gl}$  is the simplification of the capacities  $C_{st'}$  and  $C_{lc}$ , as described in Figure 2. The ratio between the capacity  $C_{sgo}$  and capacity  $C_{gl}$  is roughly 1:5. This means that about  $1/6$  of the amplitude of the pulse present on the source lines is coupled into the gate lines GL. Looking at a pair of TFT-LC cells, source line  $SL_{odd}$  and source line  $SL_{even}$  can be replaced by the average  $(SL_{odd} + SL_{even})/2$ , which is represented in Figure 6b. So the capacitive coupled voltage into the gate lines will be in this example  $4.5V/6 = 750mV$ . Note that the pulses  $SL_{odd}$  and  $SL_{even}$  are out of phase because the polarity of the applied voltage is opposite for two adjacent columns, due to the dot inversion drive scheme

Figure 6 shows a schematic XGA LCD panel with VL track disturbances due to DODO pattern. The charge brought onto the gate lines GL by capacitive coupling then discharges through the output stage (OUT<sub>x</sub>) of the gate drivers (GD1-GD3) to the local VL's (VL<sub>1</sub>, VL<sub>2</sub>, VL<sub>3</sub> etc.) of the corresponding gate driver. The discharge current passes through the resistors  $R_p$  of the VL LCD-panel-track.

The total gate line capacitance for an XGA LCD-panel is typically 257nF ( $=768\text{-lines} \times 3072\text{-columns} \times 109fF/\text{gate line}$ ) and the mean LCD-panel track resistance 50Ω ( $2 \times 25\text{ Ω}$  (mean value is from the VL supply to the middle gate driver device)). The resulting RC time constant for the discharge process is thus 12.9ms ( $50\text{ Ω} \times 257nF$ ), which is very close to the XGA row time of about 20 ms. This means that the discharge process cannot be finished within one row time, since typically 6 tau are required to discharge VL within the accuracy of a 6-bit LCD-panel.

The voltage on the local VL's shows the same discharge curve as the current that flows through the individual resistance  $R_p$ . Thus, the discharge amplitude and waveform is much

different for VL<sub>1</sub>, VL<sub>2</sub> or VL<sub>3</sub>, since the impedance towards the VL supply is position dependent (number of series-connected R<sub>p</sub>'s).

Figure 7 shows an XGA LCD-panel with the local waveforms on VL<sub>1</sub>, VL<sub>2</sub> and VL<sub>3</sub> when the DODO pattern is applied to the columns. It clearly highlights that the disturbance on VL<sub>1</sub>, VL<sub>2</sub> and VL<sub>3</sub> significantly differ at the sampling point  $t_{\text{sample}}$ , when the active gate line GL<sub>y</sub> goes low.

Figure 8 shows a sampling of dot voltage. At the sampling point  $t_{\text{sample}}$ , the voltage at the source line SL<sub>x</sub> is sampled on the dot. A voltage  $V_{\text{GLy-1}}$  different from the ideal VL value results in an extra charge on the dot, which is preserved on the capacities C<sub>st</sub> and C<sub>lc</sub>, once the TFT transistor is off. Since the mean voltage on GL<sub>y-1</sub> is VL, the mean voltage on the dot cell gets an offset voltage of  $\Delta V_{\text{dot}} = -(V_{\text{GLy-1}}(t_{\text{sample}}) - VL) \cdot C_{\text{st}}' / (C_{\text{st}}' + C_{\text{lc}})$ .

Since C<sub>st</sub> and C<sub>lc</sub> are about the same, the mean dot voltage has an offset (error) of approximately half the voltage  $V_{\text{GLy-1}} - VL$  at the sampling moment. Because the disturbance on  $V_{\text{GLy-1}}$  is equal to the disturbance of the local VL<sub>1</sub> to VL<sub>3</sub> lines at the input of the gate drivers, the error in the dots depends on the local VL disturbance. Because the VL track resistance increased in finite steps from gate driver to gate driver, the dot error voltage  $\Delta V_{\text{dot}}$  also makes a step at the boundary between two gate drivers. This step in the error function can be detected by the eye and is showed in Figure 3. The visible result is a horizontal block-dim with grey shades of different intensity and with edges corresponding to the boundary of every gate driver device.

There is another effect which results in a block-dim. The second block-dim effect can occur with any pattern. It is not as strong as first block-dim effect and can usually not be detected by human eye. Careless supply routing of VL on the LCD-panel, on chip or generally large VL track resistance can however bring this effect to detectable levels. The second cause for the disturbances on VL is the discharge current of gate line GL<sub>y</sub>, when the gate driver switches to the 'OFF' state (VL). The charge of GL<sub>y</sub> discharges through the output stage into the local VL<sub>x</sub> supply of the corresponding gate driver and then through the VL track resistance R<sub>p</sub> to the VL supply. At the first time after the switching of GL<sub>y</sub>, a significant part

of the charge is locally distributed over all other gate lines of the same driver, e.g. the capacitance of all unselected gate lines acts as a VL decoupling capacitor. This local VL decoupling reduces the amplitude of the disturbance on the local VL<sub>x</sub> by a large amount. The unselected lines of the adjacent gate drivers also act as local decoupling capacitances,  
 5 reducing the amplitude of the disturbance further.

Figure 9 shows 3 pulses for each local VL<sub>x</sub>. The first pulse shows the local disturbance when any GL driven from device gate driver GD1 is going low. The second pulse is the local disturbance when a GL from gate driver GD2 switches and the third pulse happens when a  
 10 GL from gate driver GD3 switches. The disturbance or spike on VL happens exactly at the sampling moment. Because the TFT is rapidly closing, only a small part of the error  $V_{GL,y-1}(t_{\text{sample}})$ -VL will be injected into the dot. It would however be possible that in some applications this can lead to a visible dim.

15 Figure 10 shows a LCD-panel with additional supply track VL<sub>clean</sub>. The main problem with the DODO pattern is that the local supplies of the gate driver devices (VL<sub>1</sub>, VL<sub>2</sub>, VL<sub>3</sub>, etc.) do not recover fast enough from the coupling of the source lines. The time constant is much too long due to the large LCD-panel resistance and the large sum of the LCD-panel gate line capacitance. This time constant can practically not be reduced.  
 20 However, the VL error voltage has only a detrimental effect to the storage capacitors of the addressed line of the LCD-panel at sampling point. Whether the non-addressed lines have their capacity C<sub>st</sub> reference voltage jumping around from line to line is only of second importance, since it does not alter the sampling operation of the dots. The present invention is based on this singular observation: only the presently addressed line needs a clean or error-  
 25 less VL line connected to capacity C<sub>st</sub> in order to store the correct dot voltage at sampling point.

By adding an extra supply line on the LCD-panel which is used exclusively for discharging of the gate line GL<sub>y-1</sub> (in the case where C<sub>st</sub> is connected to previous GL) the pulse coupled  
 30 into gate line GL<sub>y-1</sub> by the source lines can be attenuated a lot faster, since the capacitance that needs to be discharged is only 1/768 (for an XGA panel) or 1/1024 (for an SXGA panel) of the total LCD-panel capacitance. As a consequence the LCD-panel track resistance

Rp2 of the VLclean supply track can be considerably higher than the LCD-panel track resistance Rp1 of VL. The same principle can be applied to a LCD-panel that has Cst connected to next gate line GL by connecting VLclean to gate line GLy+1.

- 5 Figure 11a shows the output stage architecture of a traditional 2-level gate driver. In a traditional gate driver, the PMOS transistor MP1 is conducting when the gate line is selected. NMOS transistor MN1 is conducting when the line is unselected.

Figure 11b shows the output stage architecture of a gate driver with 2 gates off VL supplies.

- 10 Instead of one PMOS MP1 and one NMOS transistor MN1, there is one PMOS MP1 and 2 NMOST (MN1 and MN2) for the gate driver with additional VLclean line. In the output stage with additional VLclean line, the timing for MP1 remains the same as with traditional gate drivers. MN1 and MN2 are however driven slightly differently. As depicted in Figure 12, MN2 is conducting during the whole phase GLy-1, so the gate line GLy-1 is connected
- 15 to VLclean line when gate line GLy is selected. MN1 is conducting in all other unselected phases, so all other gate lines are connected to VL. Note that it is recommended to turn-on MN1 already at the end of phase GLy when OUTx switches from VH to VL. This transition, which determines the sampling point (tsample) is usually induced by activating signal DIS ("disable") or EON ("output enable not").

CLAIMS

1. ALC-Display with n gate drivers (GD) and a source drivers (SD) for driving a Display with dots arranged in x rows (Rx) and y columns (Cy), the gate driver (GDn) has several output stages (OUTx) for driving the gate lines (GLy) of the display, characterised in that, an additional voltage line (VLclean) is provided, which is coupled to the output stages  
5 (OUTx) of the gate driver (GDn).
2. Display as claimed in claim 1, whereas the output stage is provided with a PMOS and two NMOS transistors and the PMOS transistor (MP1) is arranged between the supply line VH and the output (OUTx) of the output stage and the first NMOS transistor MN1 is  
10 arranged between the supply line (VL) and the output (OUTx) of the output stage and the second NMOS transistor (MN2) is arranged between the supply line (VLclean) and the output (OUTx) of the output stage.
3. Display as claimed in claim 1, whereas the additional supply line (VLclean) is routed over a  
15 separate track from VL-potential.
4. Display as claimed in claim 1, whereas the track of the supply line (VL) and the track of the supply line (VLclean) are coupled to the same supply level.
- 20 5. Display as claimed in claim 1, whereas the track of the supply line (VL) and the track of the supply line (VLclean) are connected together in a location where the track impedance to the supply circuit's output is low.
6. Method for driving a display with n gate drivers (GDn) and at least one source driver  
25 (SD), whereas dots are arranged in x rows (Rx) and y columns (Cy), the gate driver (GDn) has several output stages (OUTx) for driving gate lines (GLy) of the display and a capacitance (Cst) of the selected gate line (GLy) is connected to the previous gate line (GLy-1) characterised in that, an additional supply line (VLclean) of the output stage for row (GLy) is activated when the row (GLy+1) is activated.

7. Method for driving a display with  $n$  gate drivers (GD) and a source driver (SD), whereas dots are arranged in  $x$  rows ( $R_x$ ) and  $y$  columns ( $C_y$ ), the gate driver (GD $_n$ ) has several output stages (OUT $_x$ ) for driving the gate lines (GL $_y$ ) of the display and a capacitance (C $_{st}$ ) of the selected gate line (GL $_y$ ) is connected to the next gate line (GL $_{y+1}$ ), characterised in that, an additional supply line (V $_{clean}$ ) of the output stage for row (GL $_y$ ) is activated when (GL $_{y+1}$ ) is activated.



ABSTRACT

Display with reduced Block dim effect

The present invention is directed in general to a LCD-panel, and particularly to a LCD panel whose gate drivers (GD) are assembled without a printed circuit board (PCB). This technique is so called PCB-less, where the wiring of the gate drivers (GD) is not done with conventional printed circuit boards (PCB), but directly on the LCD-glass. The invention is also applicable for chip on glass (COG) technique, where the gate drivers (GD) are directly connected to the glass wiring. To avoid the block-dim effects, while keeping the effort and cost low, it is proposed to add an additional line (VLclean) to each output stage (OUT<sub>x</sub>), whereby the additional line (VLclean) is used solely for supplying the reference potential of the storage capacitors (C<sub>st</sub>) of the selected gate line (GL<sub>y</sub>). All other (unselected) gate lines are connected to the usual gate off supply line (VL). The VLclean line is routed as a separate track on the LCD-glass and is connected to VL supply at the glass edge or close to the power-supply's output.

Fig. 10

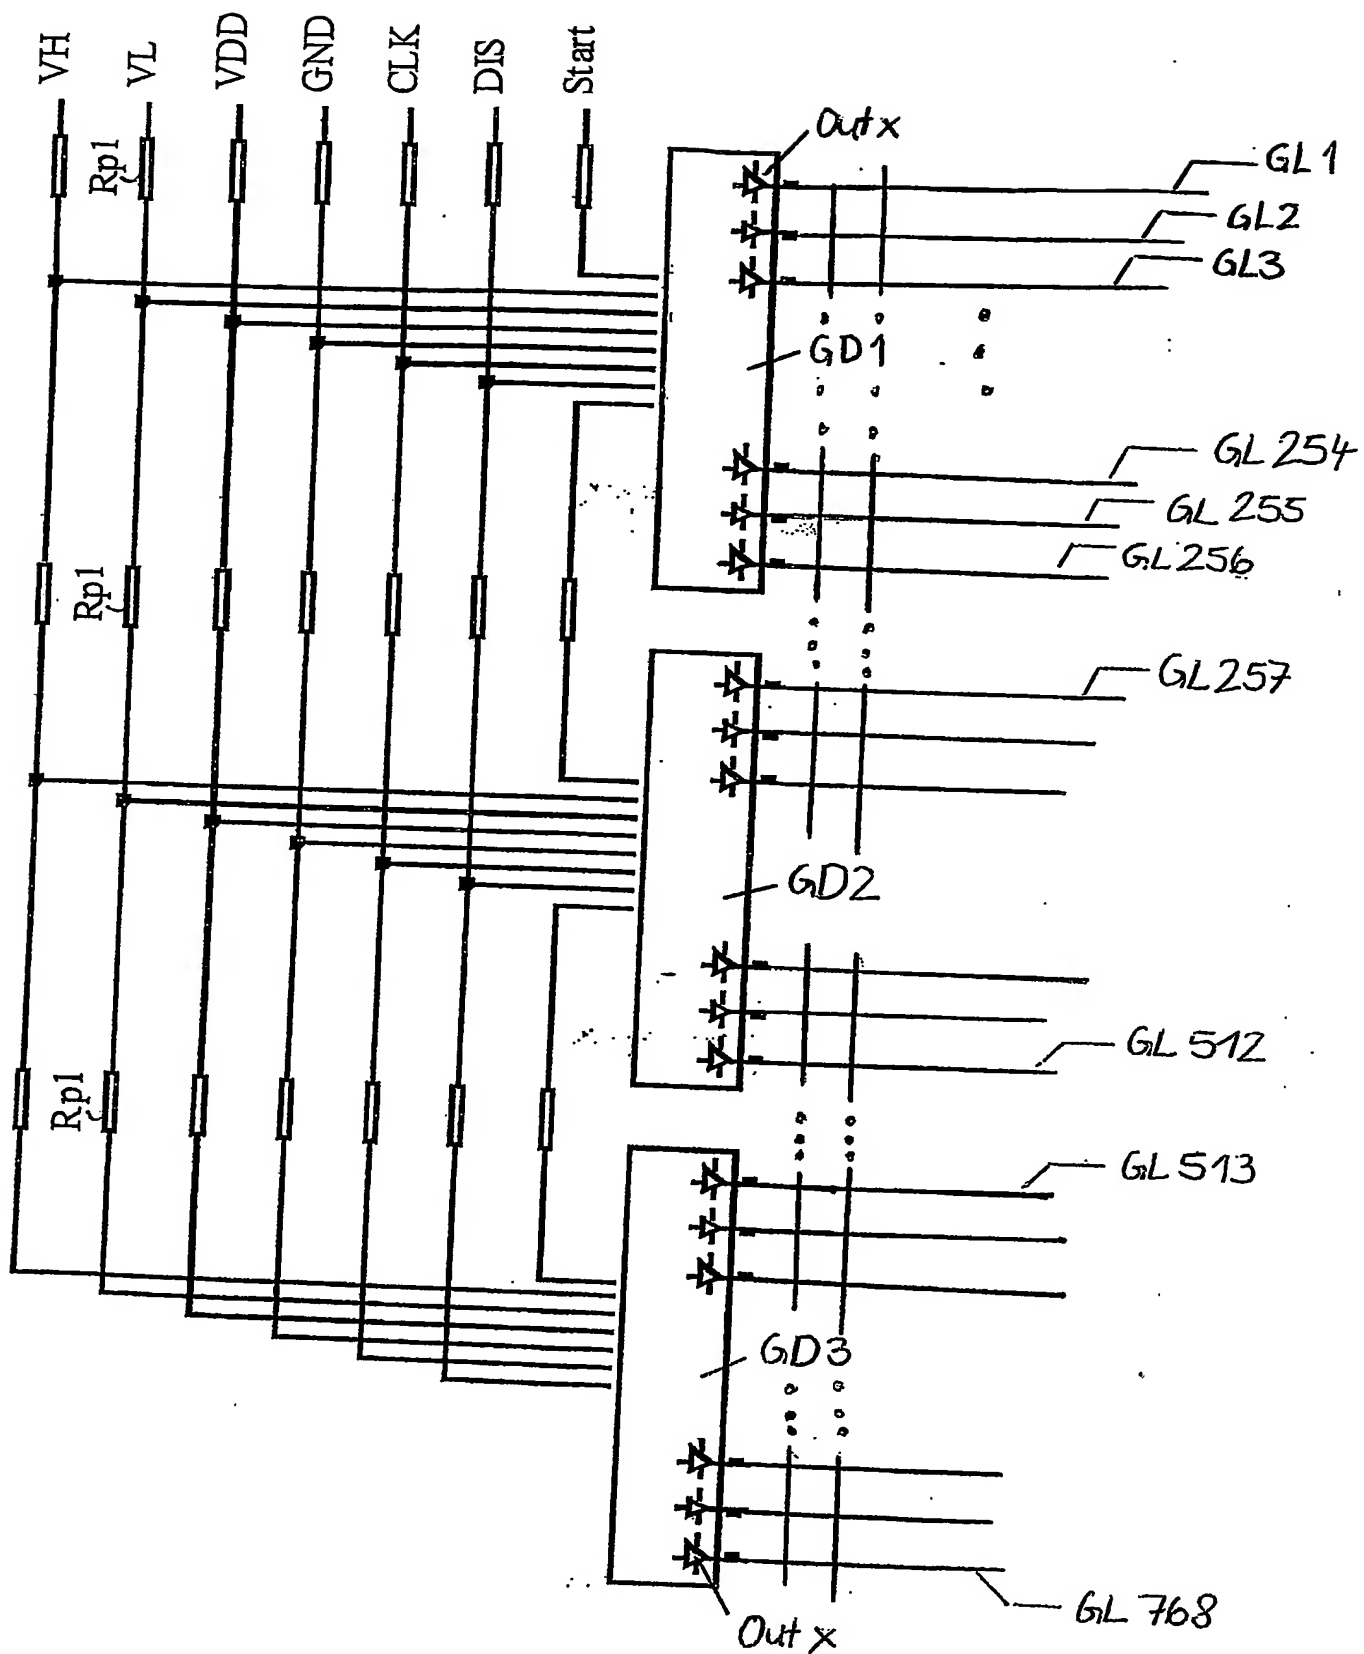


FIG. 1

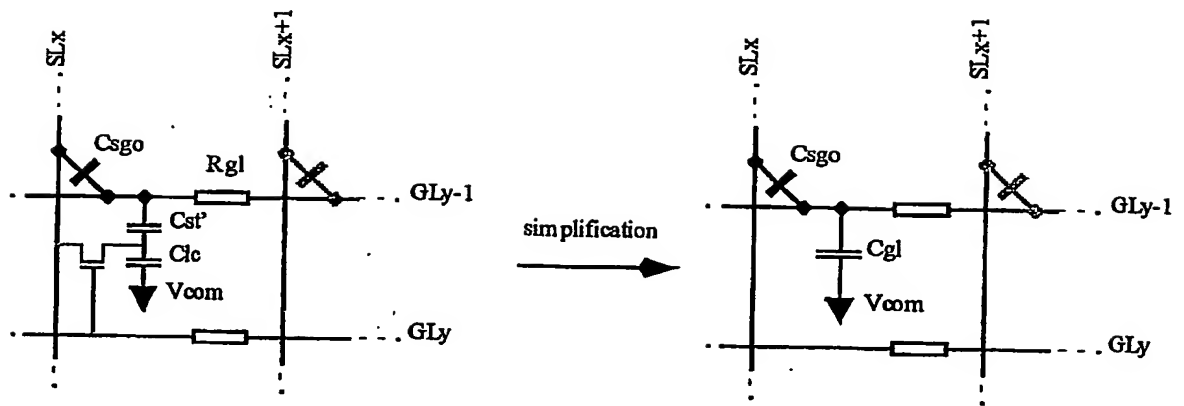


FIG. 2

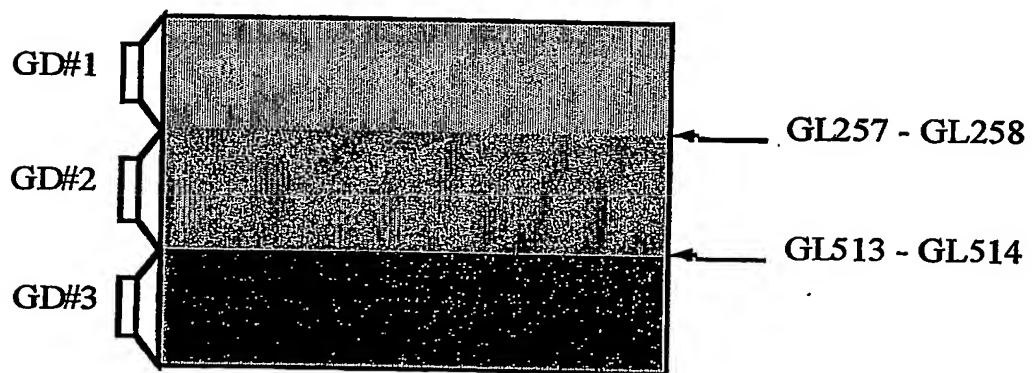


FIG. 3

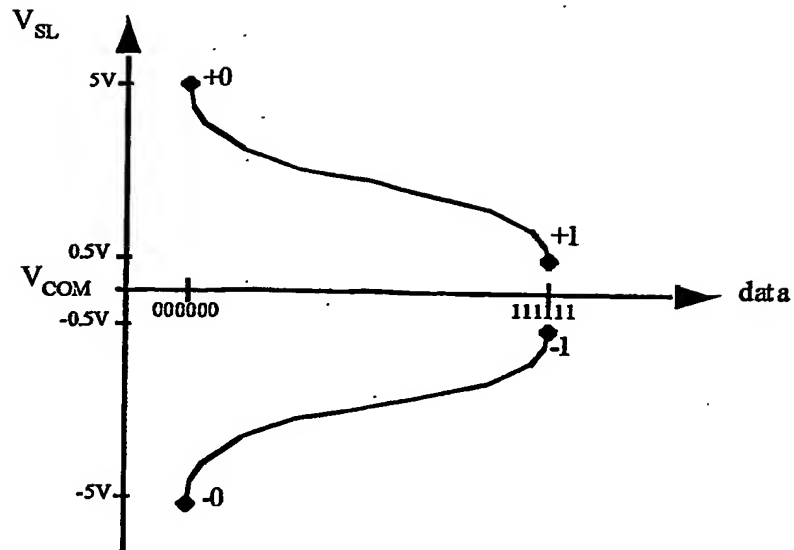


FIG. 4

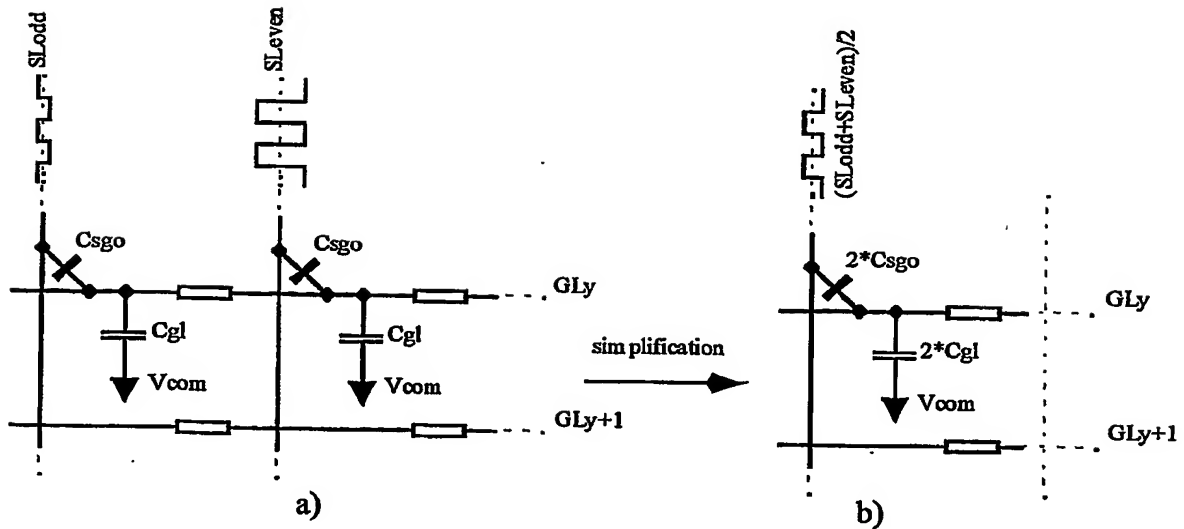


FIG. 5a

FIG. 5b

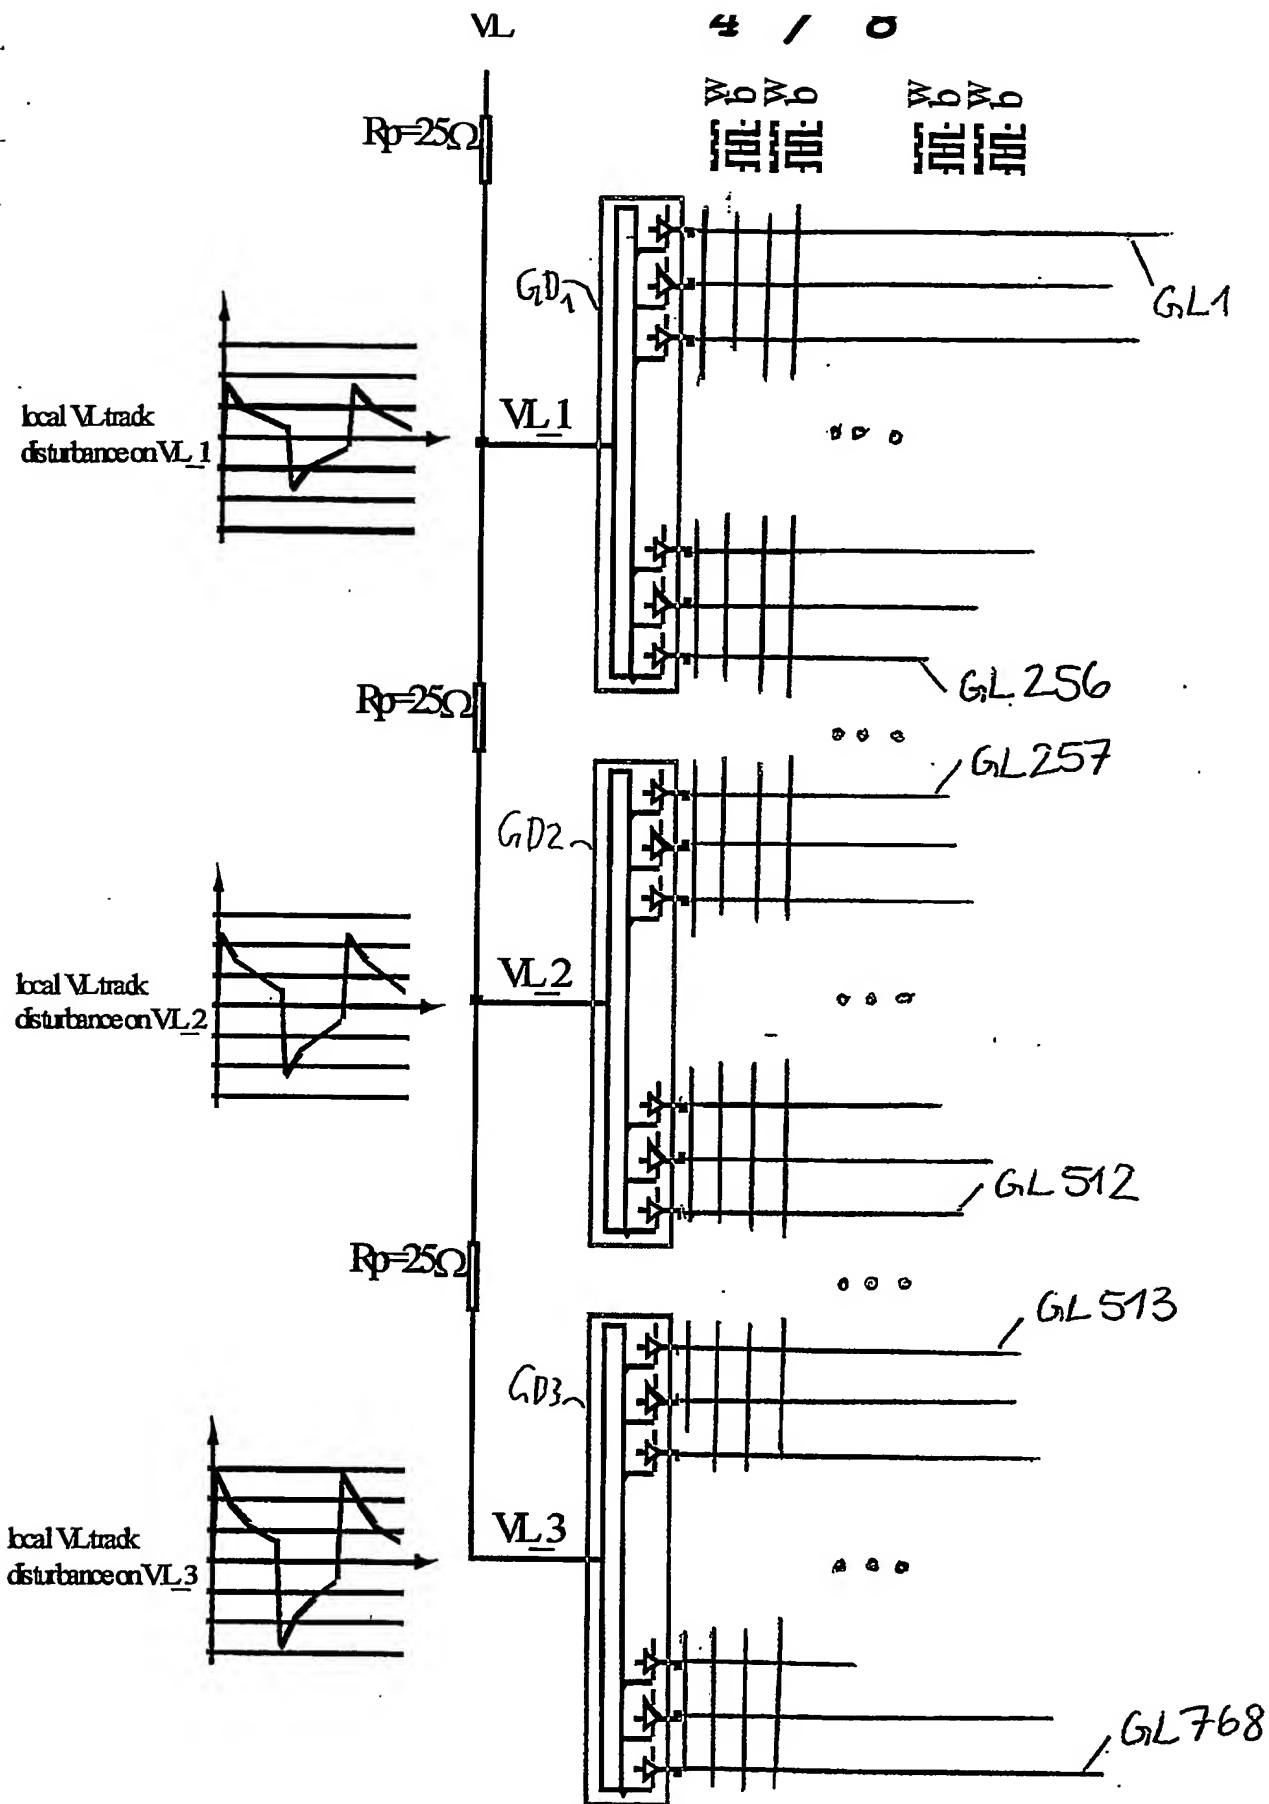


FIG. 6

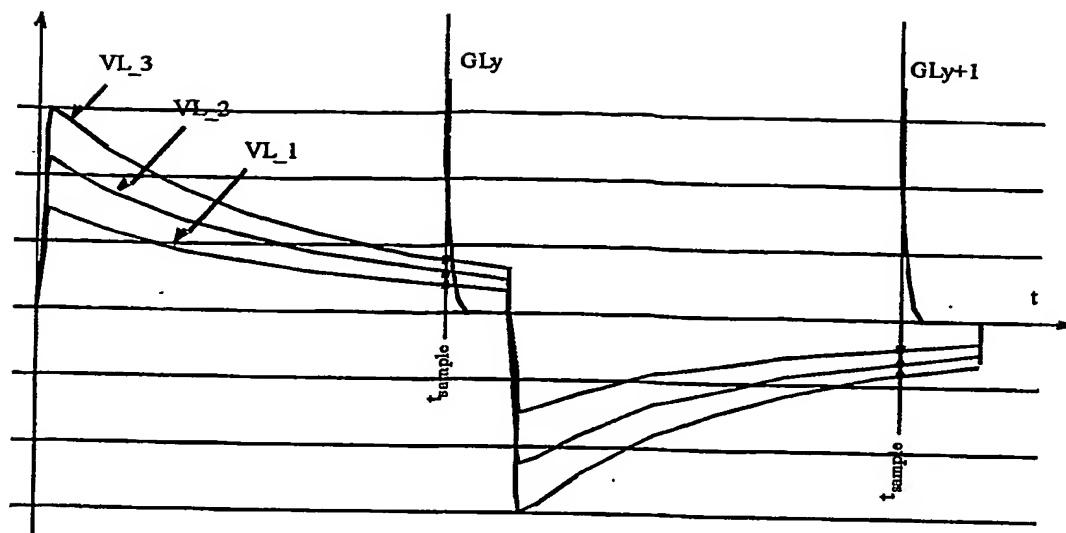


FIG. 7

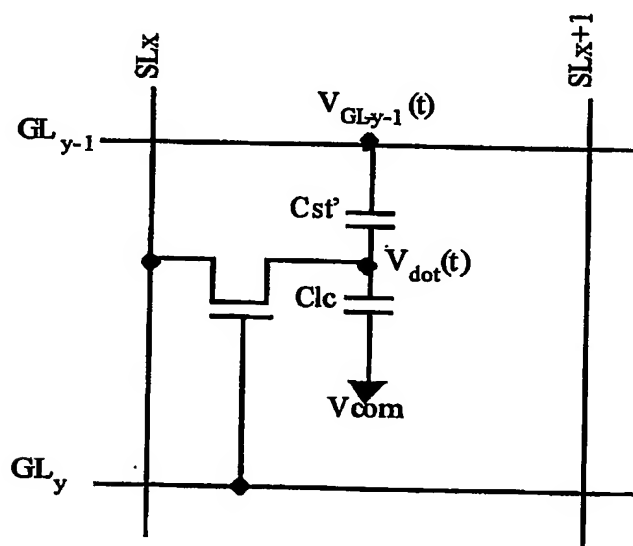


FIG. 8

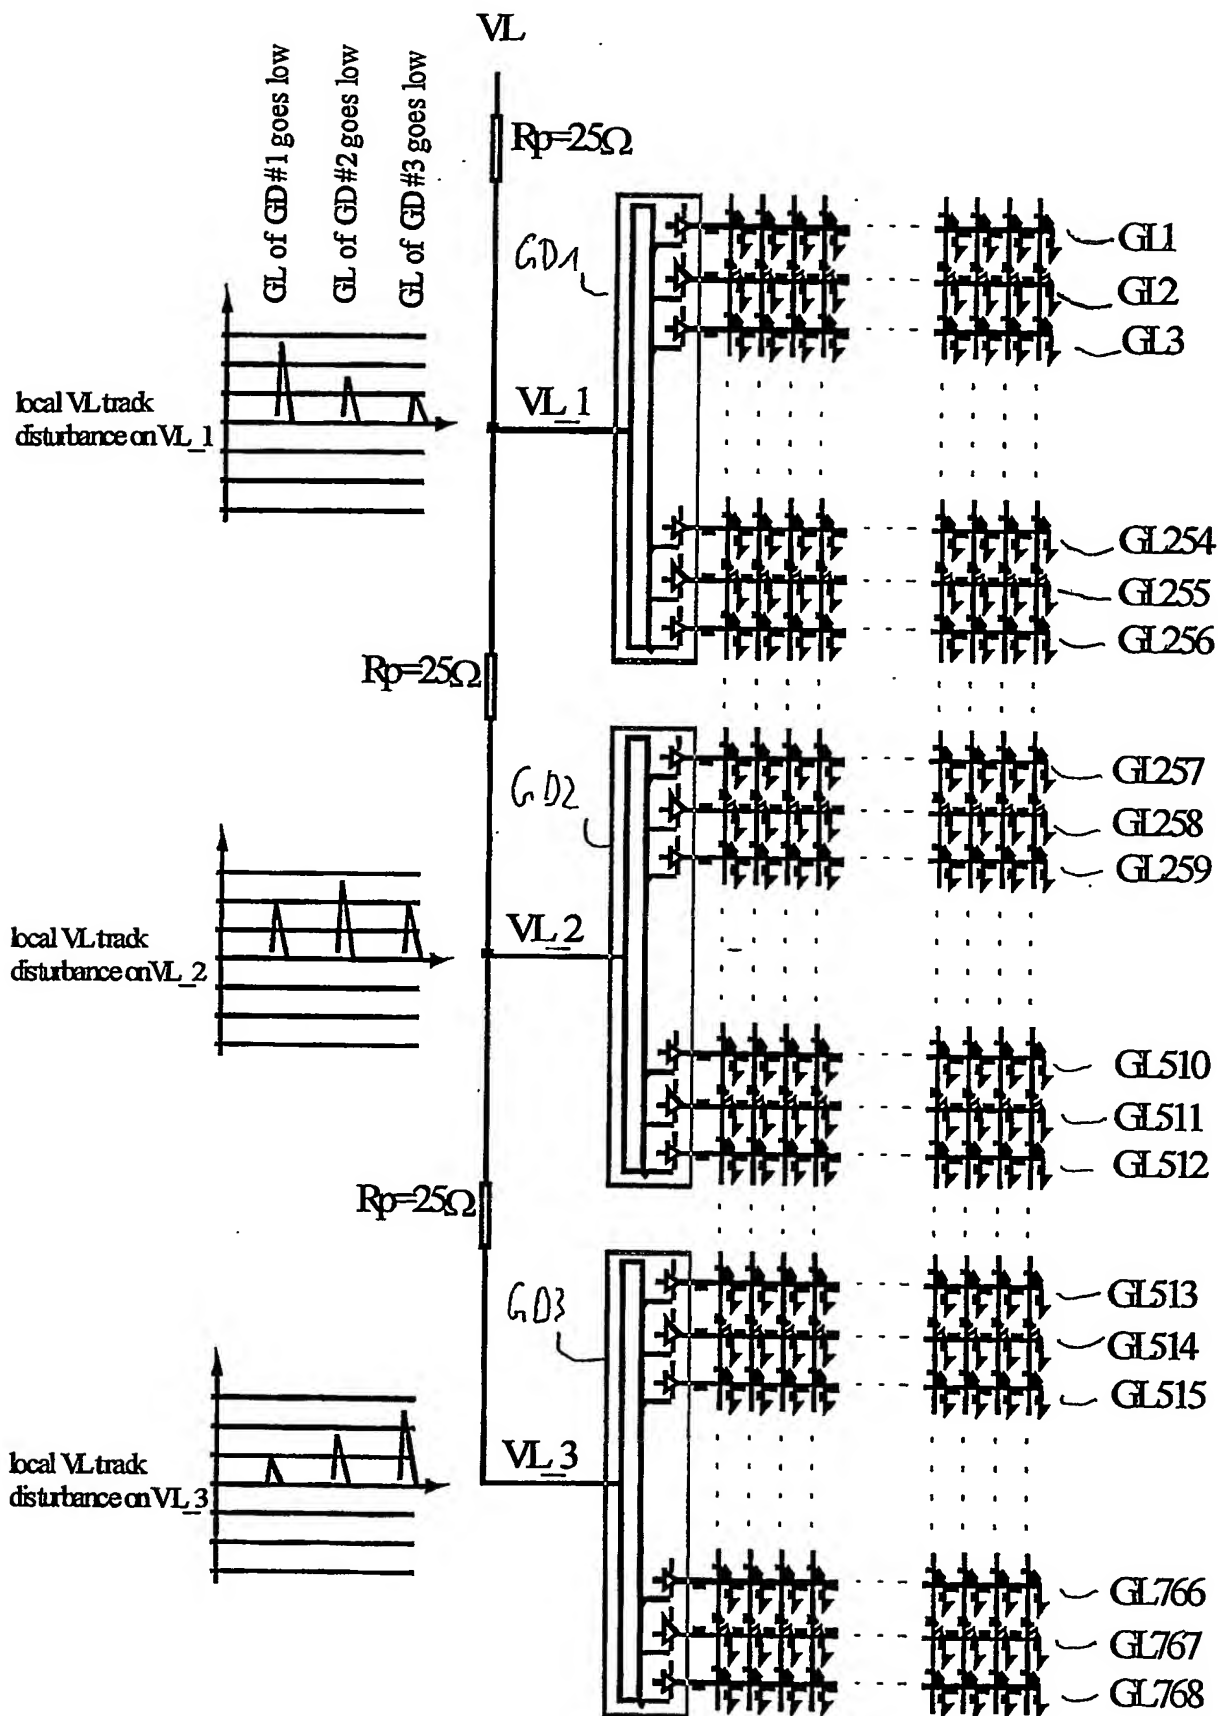


FIG. 9


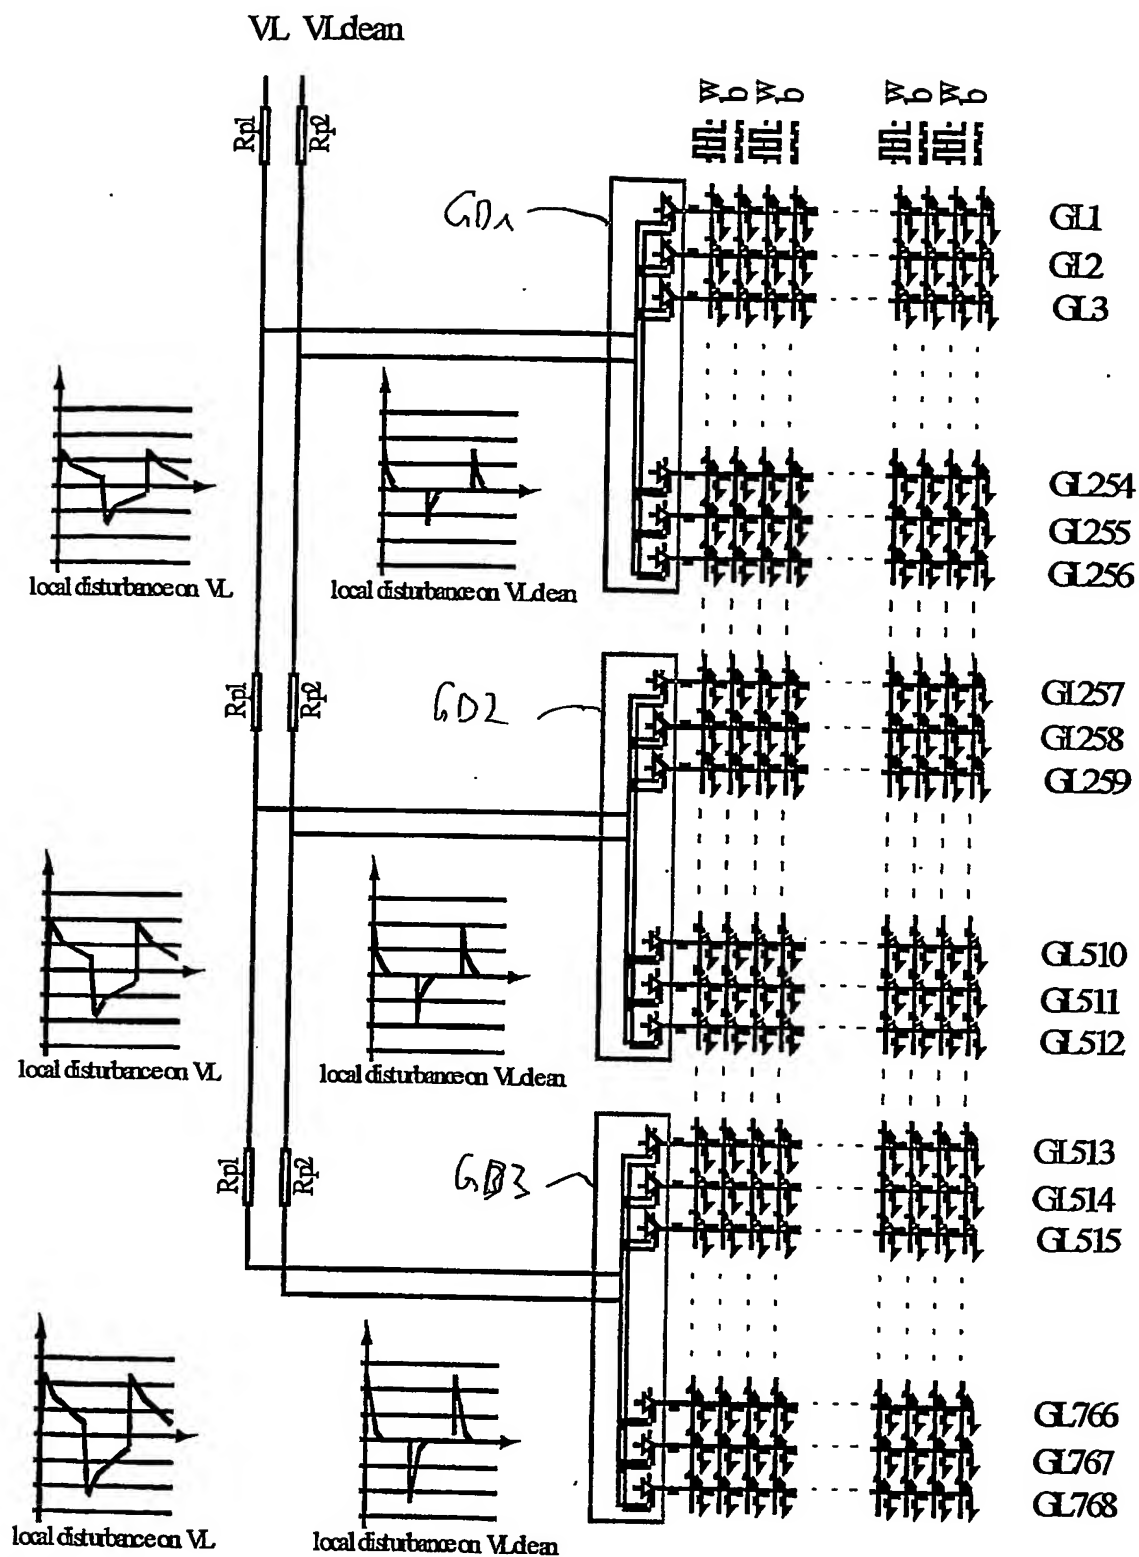



FIG. 10



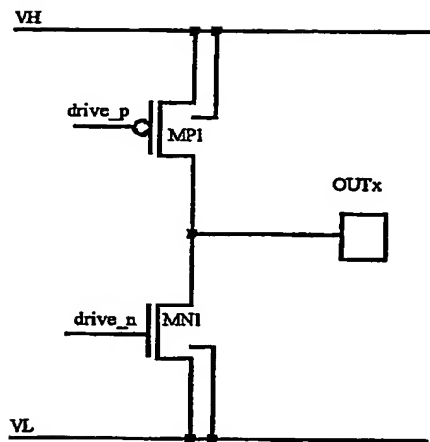

a)

FIG. 11a

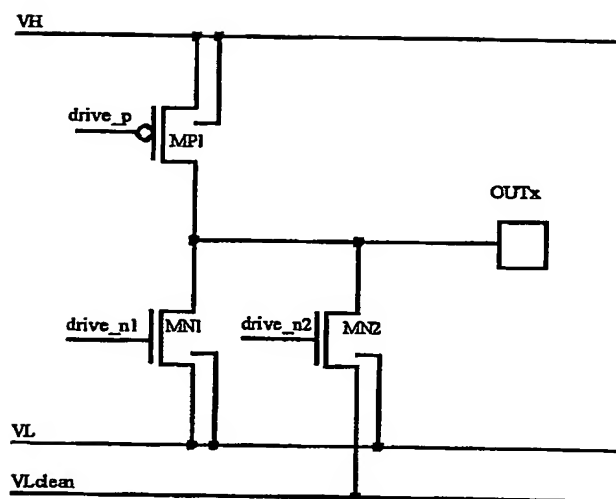

b)

FIG. 11b

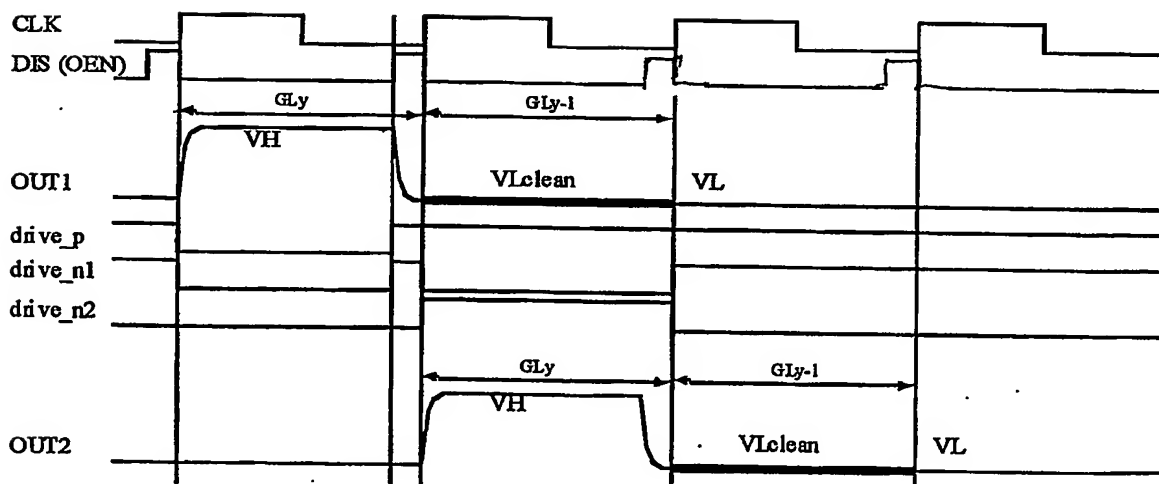


FIG. 12

PCT Application  
**IB0305214**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**